November 2011

Fixture specification

MODEL # : HSA

STYLE / LAMP / LAMP / WATTAGE / KELVIN / BALLAST / FINISH / LENS / ACCESSORIES / SIZE / COMPLIANCE
QTY TYPE DETAIL

PROJECT : _____ TYPE : _____ NOTE : _____

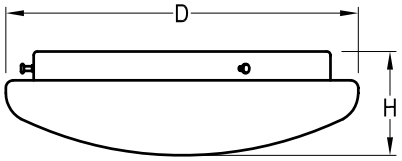

Light Source

Type	Twin Tube		Quad, Spiral or Triple			Triple		Circline T9					Circline T5 HO			Circline 2D			Diameter	Height
Wattage	9	13	13	18	26	32	42	22	32	40	22/32	32/40	22	40	55	28	38	55		
Quantity	2	1/2	1/2	1	1	-	-	1	-	-	-	-	1	-	-	-	-	-	11"	3-1/2"
	2	2/3	2/3	2	2	1	-	-	1	-	1	-	-	1	1	1	1	-	15"	3-7/8"
	-	3/4	3/4	2/3	2/3	2/3	2	-	-	1	-	1	-	1	1	-	-	-	19-1/2"	3-7/8"

Standard Features

BASE | Die Formed Steel
Mounts to Electric Box by Pre-Punched Keyhole Slots

FINISH | White

LENS | Smooth White Acrylic
UV Stabilized
Non Yellowing

LAMP | Twin, Spiral, Quad, Triple, and 2D - 2700K
Circline - 4100K

TECHNOLOGY | Electronic Ballast
Normal Power Factor
120V-60Hz AC
UL Listed
Damp Location

Special options

Please Note: Standard Features May Change if Fixtures are Ordered with Special Option(s).

BALLAST
- ☐ DV 120/277
- ☐ EBD Dimmable
- ☐ EMG Emergency
- ☐ HPF High Power Factor
- ☐ V 277 Volt

FINISH
- ☐ FB Black
- ☐ FBZ Bronzetone

LENS
- ☐ WP White Polycarbonate

KELVIN
- ☐ 3500K
- ☐ 4100K

TECHNOLOGY
- ☐ GU24 (Energy Star Compliant Component)
- ☐ LED
- ☐ Occupancy Sensor

COMPLIANCE
- ☐ ES Energy Star
- ☐ MIA Made In America

For Additional Accessories and Options Visit www.asllighting.com

ASL
25 Twelfth Street
Brooklyn, NY 11215-3820

Toll Free
Phone: 800-369-1101
Fax: 800-552-3465

Local
Phone: 718-369-1100
Fax: 718-369-1105

Online
email: info@asllighting.com
visit: www.asllighting.com

©copyright 2008 by American Scientific Lighting Corp. All rights reserved.