



LED FIXTURE SPECIFICATION

MODEL # **SAS**




FINAL MODEL #			
PROJECT			
TYPE		AREA	
NOTES			

STANDARD FEATURES: CEILING INDOOR

Fixture thermally tested to ensure longevity
 Maximum light distribution throughout lens
 Over current/voltage short circuit protection
 UL and/or CSA Compliant Listed
 Constant Current Design

FIXTURE	LED ENGINE
BASE Aluminum	LG/NICHIA/SAMSUNG, LED CHIPS
FINISH Brushed Nickel	LUMENS PER WATT AVG 100-120 @Module Efficacy
LENS White Glass	KELVIN 27K 30K 35K 40K 50K CRI 80+
LOCATION Damp	DRIVER 120 VOLTS 50/60Hz
COMPLIANT	POWER FACTOR High
LIFE HOURS 50,000	TRIAC OR ELECTRONIC
WARRANTY Limited 5 Years	Low Voltage Dimming Down To 5% With Wall Box Dimmers
MADE IN AMERICA	TESTED LM80 and LM82

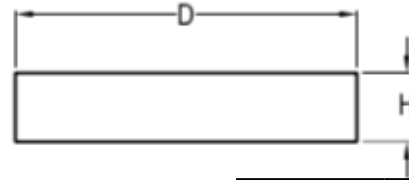

LED LIGHT SOURCE OPTIONS

ORDERING INFORMATION:

EXAMPLE		
WATTAGE: 12	KELVIN: 3000k	SIZE: 5x2
WATTAGE:	KELVIN:	SIZE:

SIZE OPTIONS	
D5 ^{1/2}	H1
D7	H1
D9	H1

SYSTEM WATTAGE	2700K WARM WHITE	3000K SOFT WHITE	3500K NEUTRAL	4000K COOL WHITE	5000K DAYLIGHT	LEGACY EQUIVALENT
10.5		600		600		
13.5		800		800		
18.5		1150		1150		

INSTALLATION (Nine simple steps.)

STEP1	STEP2	STEP3	STEP4	STEP5	STEP6	STEP7	STEP8

SPECIAL OPTIONS (please specify if applicable)

EXAMPLE				
DRIVER: DVD	FINISH: FCU	LENS: LCU	ACCESSORIES: FUS	TECHNOLOGY: CT
DRIVER:	FINISH:	LENS:	ACCESSORIES:	TECHNOLOGY:

DRIVER	FINISH	LENS	ACCESSORIES	TECHNOLOGY
<input type="checkbox"/> DV 120/277 (Non Dimmable) <input type="checkbox"/> DVD 120/277 (0-10v Dimmable)	<input type="checkbox"/> FB Black <input type="checkbox"/> FBR Bronzestone <input type="checkbox"/> FCU Custom Any RAL Finish <input type="checkbox"/> FSN Satin Nickel <input type="checkbox"/> FW White	<input type="checkbox"/> LCU Custom	<input type="checkbox"/> CCS Cable, Cord Suspension System <input type="checkbox"/> CPS Cable, Pendant Suspension System <input type="checkbox"/> FI Finial <input type="checkbox"/> FUS Fused <input type="checkbox"/> IB Individually Boxed <input type="checkbox"/> PCH Pull Chain <input type="checkbox"/> PK1 Canopy/Pendant Kit/1 ROD <input type="checkbox"/> PK2 Canopy/Pendant Kit/2 RODS <input type="checkbox"/> PK3 Canopy/Pendant Kit/3 RODS <input type="checkbox"/> SRP Surge Protection	<input type="checkbox"/> BLD Bi-Level Dimming <input type="checkbox"/> CT LED Color Tuning <input type="checkbox"/> EMG Emergency (Any Lumens Package) <input type="checkbox"/> EMGR Emergency Remote <input type="checkbox"/> OS Occupancy Sensor On/Off <input type="checkbox"/> OSCD Occupancy Sensor Step Dimming

ASL LIGHTING

25 TWELFTH ST. BROOKLYN, NY 11215-3820 | EMAIL: INFO@ASLLIGHTING.COM | WWW.ASLLIGHTING.COM

TOLL FREE: P 800-369-1101 F 800-552-3465 | LOCAL: P 718-369-1100 F 718-369-1105

Specifications and dimensions are subject to change without notice / Consult your ASL lighting representative.

© Copyright 2016 By American Scientific Lighting Corporation. All rights reserved.

